



OIL STORAGE, DELIVERY & METERING SOLUTIONS



AA1000-2C-GN

ALEMLUBE DOUBLE MODULAR BENCH OIL TANK WITH SAMOA EQUIPMENT

- Complete with 2 x 500L modular tanks with Samoa 3:1 pumps, gantries, 15m hose reels, electronic oil meters & air regulators

AA1000-2C-GN-EL as above but with EL Series pumps, hose reels & meters



AA1500-3C-GN

ALEMLUBE TRIPLE MODULAR BENCH OIL TANK WITH SAMOA EQUIPMENT

- Complete with 3 x 500L modular tanks with Samoa 3:1 pumps, gantries, 15m hose reels, electronic oil meters & air regulators

AA1500-3C-GN-EL as above but with EL Series pumps, hose reels & meters



AA1500-3C-OTN-EL

ALEMLUBE TRIPLE MODULAR BENCH OIL TANK WITH EL SERIES EQUIPMENT

- Complete with 3 x 500L modular tanks with EL Series oil bar taps and drum level measuring gauges

AA1500-3C-OTN as above but with Samoa equipment



AA1000-2C-OTN

ALEMLUBE DOUBLE MODULAR BENCH OIL TANK WITH SAMOA EQUIPMENT

- Complete with 2 x 500L modular tanks with Samoa oil bar taps and drum level measuring gauges

AA1000-2C-OTN-EL as above but with EL Series equipment



*Applies to the vast majority of Alemlube products unless indicated otherwise



**O30050
ALEMLUBE EL SERIES
OIL TRANSFER KIT
WITH METER**

- Flow rates of up to 10L/min
- Includes a 3:1 ratio oil pump, 1/2" hydraulic hose, electronic oil meter & adjustable 2" bung adaptor
- Suits 205L drums and transfers engine, gear hydraulic oils up to SAE130 & ATF
- Maximum operating pressure of 450psi (30bar)



**O30060
ALEMLUBE EL SERIES
MOBILE 205L
OIL TRANSFER KIT**

- Transfer kit flow rates of up to 10L/min
- Maximum operating pressure of 450psi (30bar)
- Kit complete with 3:1 ratio oil pump, 1/2" ID hydraulic hose, electronic oil meter, 2" bung adaptor to suit 205L drums & robust trolley
- Maximum oil viscosity of SAE130



**O30070
ALEMLUBE EL SERIES
MOBILE 205L
OIL TRANSFER KIT
WITH HOSE REEL**

- Transfer kit flow rates of up to 8L/min
- For engine, gear & hydraulic oils up to SAE130 & ATF
- High mobility kit complete with 3:1 ratio oil pump, oil hose reel with 15m x 1/2" ID hydraulic hose, electronic oil meter, 2" bung adaptor to suit 205L drum & robust heavy duty trolley



**376300
SAMOA AIR
OPERATED
MOBILE OIL
TRANSFER KIT**

- Flow rates of up to 15L/min
- Includes a 3:1 ratio drum pump, 3m x 1/2" ID hydraulic hose & an electronic resettable meter with totaliser
- Electronic oil meter accurate to 0.5%
- 3:1 ratio pump suits 205L drum
- Drum not included



**378100
SAMOA
MOBILE OIL
TRANSFER KIT
WITH HOSE REEL**

- Supplied with 3:1 air operated oil pump, 10m hose reel, electronic meter & heavy duty drum trolley
- Quick, efficient and effortless oil transfer in car, light commercial vehicle & truck workshops
- Adjustable flow rates of up to 15L/min
- Electronic oil meter powered by standard AAA batteries



**O300240
ALEMLUBE EL SERIES
MOBILE LUBE KIT
WITH OIL GUN, HOSE
REEL & HEAVY DUTY
TROLLEY**

- EL Series 3:1 pump
- 10 meter oil hose hose
- Heavy duty trolley with pneumatic wheels
- Electronic metered oil control valve

OIL TRANSFER



WORKSHOP SOLUTIONS




**432000
SAMOA
205L DRUM
TROLLEY**

- 205L drum trolley supplied inclusive of one rubber swiveling wheel with brake
- A hose reel or a pump can be mounted using optional brackets



**O300100
ALEMLUBE EL SERIES
OIL MEASURE FILLER KIT
WITH DRIP TRAY**

- Delivers up to 10L/min
- Recommended operating pressure of 60psi (4bar)
- Maximum oil viscosity of SAE80
- 1/2" BSP(m) oil delivery connection
- Suction tube length of 940mm, diameter 52mm

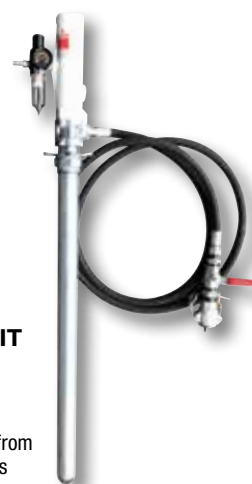

**454112
SAMOA
PUMP OVER KIT**

- Samoa 3:1 oil pump, 2.8 meter hose, ball valve & camlock
- Ideal for oil transfer from drums into bulk tanks



**454100N
SAMOA
OIL MEASURE FILLING KIT
WITH DRIP TRAY**

- Comes complete with the Samoa high volume 2:1 ratio pump (352220), oil bar tap (361100), connecting tubing & oil measure holding tray (736462)
- Easy filling delivery: approximately 23L per minute
- Suits 60 & 205L drums



**454111N
SAMOA
OIL TRANSFER KIT
WITH ON/OFF GUN**

- Transfer rates of up to 15L/min
- Includes a high quality 3:1 ratio pump, 3m x 1/2" ID hydraulic hose & on/off control valve
- Suitable for engine, gear, diff & hydraulic oils
- Ideal for transferring higher viscosity lubricants in colder type climates



**454110N
SAMOA
OIL TRANSFER KIT
WITH METER**

- Transfer rates of up to 12L/min
- Includes a high quality 3:1 ratio pump, 3m x 1/2" ID hydraulic hose & an electronic resettable meter with totaliser
- Suitable for engine, gear, diff & hydraulic oils
- 3/4" BSP(f) material outlet



O30030
ALEMLUBE EL SERIES
3:1 AIR OPERATED
205L DRUM OIL PUMP

- Delivers up to 20L/min
- Maximum operating pressure of 450psi (30bar)
- Maximum oil viscosity of SAE130
- Air consumption of 3.6cfm at 150psi
- 1/2" BSP(m) oil outlet
- 1/4" BSP(f) air inlet connection
- Suction tube length of 940mm,



O300140
ALEMLUBE EL SERIES
5:1 AIR OPERATED
205L DRUM OIL PUMP

- Delivers up to 15L/min
- Maximum operating pressure of 750psi (50bar)
- Maximum oil viscosity of SAE240
- Air consumption of 2.8cfm at 80psi
- 1/2" BSP(m) oil outlet
- 1/4" BSP(f) air inlet connection
- Suction tube length of 940mm,



O300120
ALEMLUBE EL SERIES
3:1 AIR OPERATED OIL
STUB PUMP

- Delivers up to 20L/min
 - Maximum operating pressure of 450psi (30bar)
 - Maximum oil viscosity of SAE130
 - Air consumption of 3.6cfm at 150psi
 - 1/2" BSP(m) oil outlet
 - 1/4" BSP(f) air inlet connection
 - Suction tube length of 270mm, diameter 42mm
- O300130** as above but delivers 15L/min



353120
SAMOA 3:1 RATIO
OIL TRANSFER STUB PUMP

- Flow rates of up to 35L/min
- For medium size systems which involve hose reels and metered oil dispensing guns without simultaneous operation
- Air inlet pressures of between 40-140psi (3-10bar)
- 1/2" BSP(f) fluid outlet
- 1/4" BSB(f) air inlet
- Suitable for bulk tank application

354120 as above but suits 205L drums



347120
SAMOA 5:1 RATIO
OIL TRANSFER STUB PUMP

- Maximum free flow of up to 30L/min
- Ideal for dispensing high viscosity lubricants in sites with multiple banks of reels
- Can service up to 8 reels
- 3/4" BSP(f) fluid outlet
- 3/8" BSP(f) air inlet
- Suitable for bulk tank applications

348120 as above but suitable for bulk tank applications



340120
SAMOA 3:1 RATIO
HIGH VOLUME
OIL TRANSFER STUB PUMP

- Flow rates of up to 42L/min
- Suitable for bulk tank applications
- 3/4" BSP(f) fluid outlet
- 3/8" BSP(f) air inlet
- Typically used in mining, construction and locomotive servicing workshops requiring fast & efficient oil transfer

OIL PUMPS & METERING

WORKSHOP SOLUTIONS



O300160
ALEMLUBE EL SERIES
FILTER / REGULATOR / LUBRICATOR
COMBINATION

- Filter has high division efficiency & differential pressure discharge
- Discharges water automatically
- Regulator valve has balanced inlet structure with stable pressure, high precision & quick reaction
- Lubricator provides good lubrication for the pneumatic system, with easy adjustment of the oil drip



O30080
ALEMLUBE EL SERIES
ELECTRONIC OIL METER

- Delivers up to 35L/min
- Pressure range of 70-725psi (5-50bar)
- Maximum oil viscosity of SAE130
- 1/2" BSP(f) inlet connection
- 5 digit liquid crystal display with low battery indicator
- Meter powered by an easily replaceable 3V CR2 batter



365300
SAMOA ELECTRONIC
PRESET OIL METER

- Maximum flow rate of 30L/min, minimum flow rate of 1L/min
- 1/2" BSP(f) swivel supplied standard
- Can automatically meter from 99.9L & includes a totaliser
- Maximum operating pressure of 994psi (69bar)
- Up to five preselected batch quantities are programmable into memory



363114
SAMOA
OIL CONTROL VALVE

- Flow rates of up to 40L/min
- 1/2" BSP(f) inlet port & swivel
- Maximum working pressure of 1,450psi (100bar)
- Compact ball bearing swivel with integrated oil filter ensures a long working life
- Manual open/close nozzle operation minimises annoying oil drips & leaks



365534
SAMOA
ELECTRONIC OIL METER

- Maximum flow rate of 30L/min
- Fluid inlet is a 1/2" BSP(f) swivel
- Maximum operating pressure of 1,450psi (100bar)
- Runs with standard AAA batteries
- Accurate to $\pm 0.5\%$
- Control valve can be automatically locked as required
- Also suitable for use with ATF and antifreeze



O30020
ALEMLUBE EL SERIES
WASTE OIL DRIP TRAY

- Controls & collects oil drips
- Suitable for all brands of hose reels/control valves
- Easily removed catchment tray for emptying & cleaning
- Modular design suits any workshop
- Dimensions: 704mm (H) x 214mm (W) x 81.5mm (D) 165mm (D) inclusive of drip tray



**SOI700
ALEMLUBE S SERIES
OIL HOSE REEL**

- Supplied with 10m x 12mm ID hose & lead in hose
- Automatic and positive latching mechanism
- Working pressure of up to 2,000psi (138bar)
- 1/2" BSP(f) inlet/outlet
- Detachable steel mounting bracket enables 180° hose reel rotation
- Impact resistant UV stabilised covers for maximum durability
- Can be wall, ceiling or floor mounted



**O30090
ALEMLUBE EL SERIES
OIL HOSE REEL**

- Heavy duty dual pedestal construction
- Powder coated with a galvanised base
- Complete with 15m x 1/2" ID S.A.E. 1001R1 wire braid hose
- Maximum pressure of 2,320psi (160bar)
- Working temperature of -20°C - +100°C
- 1/2" BSP(f) inlet and 1/2" BSP(m) outlet
- Can be ceiling or floor mounted
- Adjustable guide arm



**HR90065
ALEMLUBE EL SERIES
TWIN PEDESTAL OIL HOSE REEL**

- Working pressure of up to 2,000psi (138bar)
- Includes 25m x 12mm ID S.A.E.100R1AT hose & hose stop
- 1.5mm thick robust drum with stiffening ribs & flange edges
- Can be mounted on the floor, wall or ceiling
- Durable long lasting powder coated finish



**506202
SAMOA
SINGLE PEDESTAL
OIL HOSE REEL**

- 10m x 12mm ID hose capacity
- Lightweight one piece molded composite barrel assembly, will not distort or corrode
- 4 x extra large 10mm long plastic ratchet mechanism & latch pawl
- Full ported shaft & swivel facilitates

506222 as above but suits 205L drums



**504250
SAMOA
TWIN PEDESTAL OIL HOSE REEL**

- Maximum working pressure of 2,300psi (160bar)
- 1/2" BSP(m) inlet/outlet
- Supplied complete with 15m x 1/2" ID R1 hose & 0.8m inlet hose
- Full 1/2" ID port, shaft & swivel
- Heavy duty double pedestal construction
- Versatile positioning of hose guide arm
- Floor, wall, ceiling or tank mountable



**507222
SAMOA
COVERED OIL HOSE REEL**

- Complete with 15m x 12mm ID hose & 0.8m inlet hose
- Maximum working pressure of 2,240psi (160bar)
- 1/2" BSP(m) inlet/outlet
- Two corrosion-proof die cast aluminium covers resist bending or distortion due to angular pull
- Can be wall, ceiling, floor or tank mounted

HOSE REELS

WORKSHOP SOLUTIONS



**HR90055
ALEMLUBE EL SERIES
OIL, FUEL & WASTE OIL
SPRING REWIND HOSE REEL**

- Working pressure of up to 1,250psi (86bar)
- Includes 20m x 19mm ID SAE 100R2 AT hose & hose stop
- 1.5mm thick robust drum with stiffening ribs & flange edges
- Can be mounted on the floor, wall or ceiling
- Durable long lasting powder coated finish



**HR90060
ALEMLUBE EL SERIES
OIL, FUEL & WATER SPRING REWIND
HOSE REEL**

- Working pressure of up to 2,000psi (138bar)
- Includes 30m x 12mm ID SAE 100R2 AT hose & hose stop
- 1.5mm thick robust drum with stiffening ribs & flange edges
- Can be mounted on the floor, wall or ceiling
- Durable long lasting powder coated finish



**HR90050
ALEMLUBE EL SERIES
OIL, FUEL & WASTE OIL SPRING
REWIND HOSE REEL**

- Working pressure of up to 1,000psi (69bar)
- Includes 15m x 25mm ID SAE 100R1 AT hose & hose stop
- 1.5mm thick robust drum with stiffening ribs & flange edges
- Reinforced steel frame provides maximum strength & stability
- Can be mounted on the floor, wall or ceiling
- Durable long lasting powder coated finish



**505224N
SAMOA
3/4" SPRING REWIND FUEL,
OIL, AIR & WATER HOSE REEL**

- Heavy duty full metal double pedestal construction
- Hose capacity: 15m x 19mm ID
- Hose pressure rating 1,500psi (103bar)
- 3/4" BSP(f) inlet/outlet
- True 3/4" full flow shaft & ports
- Seven position outlet arm
- Supplied with 15m x 19mm ID hose



**508225
SAMOA
1" X 15M HIGH VOLUME HOSE REEL**

- Long-life heavy duty double arm design
- Supplied with 15m x 1" BSP(f) ID hose
- 1,250psi (86bar) hose pressure rating
- 1" port nickel coated steel shaft and swivel
- Wide welded base arms
- Bearing mounted spool: minimum friction to reduce torque load on power spring
- Suitable for use with fuel, oil, air, water & waste oil



**360117
SAMOA
HOSE REEL MOUNTING BRACKET**

- Allows five open-type or enclosed hose reels to be mounted in a bank
- Suitable for ceiling or wall mounting
- Hose reel installation points are pre-drilled and threaded to reduce installation time
- Guarantees perfect hose reel alignment
- Hose reel & meter not included

360115 also available but 3 reel mounting bracket



**75460
ALEMLUBE 400L
SELF BUNDED TANK**

- 2" BSP(f) inlet ports
- Consists of an internal HDPE tank surrounded by an integrated galvanised sheet steel bund
- Suitable for the storage of fresh oil, waste oil & diesel fuel
- Integrated pallet for driving under with a forklift or hand forklift from any of the four sides
- Low centre of gravity for stability and ease of handling
- Dimensions of 730mm (L) x 700mm (W) x 1,170 (H)



**73900
ALEMLUBE 700L
SELF BUNDED TANK**

- 2" BSP(f) inlet ports
- Consists of an internal HDPE tank surrounded by an integrated galvanised sheet steel bund
- Suitable for the storage of fresh oil, waste oil & diesel fuel
- Integrated pallet for driving under with a forklift or hand forklift from any of the four sides
- Dimensions of 1,135mm (L) x 727mm (W) x 1,100mm (H)



**73920N
ALEMLUBE
1,000L SELF
BUNDED TANK**

- 2" BSP(f) inlet ports
- Consists of an internal HDPE tank surrounded by an integrated galvanised sheet steel bund
- Suitable for the storage of fresh oil, waste oil & diesel fuel
- Integrated pallet for driving under with a forklift or hand forklift from any of the four sides
- Dimensions of 1,280 (L) x 770mm (W) x 1,420mm (H)



**75490
ALEMLUBE
1,500L SELF
BUNDED TANK**

- 2" BSP(f) inlet ports
- Consists of an internal HDPE tank surrounded by an integrated galvanised sheet steel bund
- Suitable for the storage of fresh oil, waste oil & diesel fuel
- Low centre of gravity for stability and ease of handling
- Dimensions of 1,630mm (L) x 770mm (W)



**545110-HRK
ALEMLUBE
400L SELF BUNDED
TANK WITH SAMOA
3:1 PUMP, HOSE REEL & METER**

- Quality European equipment ensures a long service life
- Self bundled tank assists with WPH&S compliance
- Your state of the art oil storage and delivery solution can be quickly and easily moved from site to site



**6603A
ALEMLUBE
1L BRAKE
CLEANER SPRAYER**

- Large filling opening
- Safety valve at 36psi (2.5bar) with depressurisation option
- Easy tool free maintenance
- Strong translucent bottle with level indicator
- Ergonomic design
- Not suitable for use with acids

OIL STORAGE, WASTE OIL, ADBLUE® & MISCELLANEOUS



WORKSHOP SOLUTIONS



**AB80005
ALEMLUBE EL SERIES
ADBLUE® IBC
240V DISPENSING KIT**

- Flow rates of up to 28L/min
- 240V AC pump
- Polypropylene pump housing, EPDM diaphragm, Viton seals
- Stainless steel mounting base fits IBC containers
- Automatic stainless steel nozzle
- 1.5m x 3/4" ID suction & 6m x 3/4" ID delivery hoses
- Also suitable for the transfer of organic acids,



**AB80010
ALEMLUBE EL SERIES
ADBLUE® IBC
240V DISPENSING KIT**

- Flow rates of up to 28L/min
- 240V AC pump
- Polypropylene pump housing, EPDM diaphragm, Viton seals
- Stainless steel mounting base fits IBC containers
- Plastic manual nozzle
- 1.5m x 3/4" ID suction & 6m x 3/4" ID delivery hoses
- Also suitable for the transfer of organic acids,



**318008
ALEMLUBE DRUM LEVEL
MEASURING GAUGE**

- This unique mechanical measuring gauge is designed to show the level of fluid in a 205L drum
- Can be used for most fluids including oil, diesel, petrol, water, coolant, ATF, waste oil and some chemicals
- Ensure that you never run out of that crucial fluid again making reordering quick & easy
- A simple and inexpensive way to stock keep, stock take and reorder fluids



**501A
ALEMLUBE
ROTARY ACTION
DRUM PUMP**

- 2" BSP bung adaptor
- Suitable for the transfer of diesel, petrols, kerosene, lube oil & machine oil
- Delivery rates of up to 18L/min or 0.26L per rotation
- Includes 2.2m of anti static fuel hose, bung adaptor, rubber gasket, a four chamber rotor assembly, spout & spout holster
- Length: 1,300mm (4.3ft)



**AB80015
ALEMLUBE EL SERIES
ADBLUE® 205L
240V DRUM DISPENSING KIT**

- Flow rates of up to 23L/min
- 240V AC pump
- Polypropylene pump housing, EPDM diaphragm, Viton seals
- Plastic manual nozzle
- 1.5m x 3/4" ID suction & 6m x 3/4" ID delivery hoses
- Also suitable for the transfer of organic acids, detergents & water soluble inorganic chemicals



**517000-GK
ALEMLUBE
ADBLUE® GRAVITY FEED
DELIVERY KIT**

- No electric pump required
- IBC bottom outlet connection
- 60 x 6 thread IBC bottom adapter
- AdBlue® manual nozzle (part number 147610)
- 3m long spiral static wire clear delivery hose
- 19mm hose ID



**G10010N
ALEMLUBE
EL SERIES TRIGGER
ACTION GREASE GUN**

- Grease pressures of up to 4,000psi (276bar)
- Delivery rates of up to 1.15g per stroke
- Robust die cast aluminium head assembly
- Heavy duty 4 jaw coupler
- Exceptional value for money for cost conscious customers



**G10020N
ALEMLUBE
EL SERIES
LEVER ACTION
GREASE GUN**

- Grease pressures of up to 8,000psi (552bar)
- Delivery rates of up to 0.95g per stroke
- Heavy duty 4 jaw coupler
- Robust die cast head assembly
- Ideal for seasonal or intermittent use



**G10040N
ALEMLUBE
EL SERIES 18V LITHIUM-ION
CORDLESS GREASE GUN**

- Capable of delivering up to 80g/min
- Generates grease pressures of up to 10,000psi (690bar)
- 25 minutes continuous working time
- Supplied with two batteries, 3,000 mAh & 1,500 mAh
- Spare battery, recharger, 106cm long grease gun flex and plastic moulded carry case supplied standard



**630A
ALEMLUBE
20V LITHIUM-ION
CORDLESS
GREASE GUN**

- Grease pressures of up to 7,250psi/500bar
- Backlit display with real time battery level, grease level & grease meter information
- Up to 21 cartridges per charge free flow
- Blocked lube point alarm
- 2 x 2.0Ah batteries & charger, carry case, shoulder strap and 1,100mm long flex



**600A
ALEMLUBE
LEVER ACTION
GREASE GUN**

- Grease pressures of up to 12,000psi (828bar)
- Delivers up to 1.6g of grease per stroke
- 4 jaw coupler & rigid extension
- Suitable for all grease grades up to NLGI3
- Ever-Flow System enables the use of thick/tacky greases



**660AN
ALEMLUBE
TRIGGER ACTION
GREASE GUN**

- Grease pressures of up to 8,500psi (586bar)
- Delivers up to 1.1g of grease per stroke
- Ever-Flow System enables the gun to be used with thick tacky greases even in the coldest conditions
- Twin Lock System seals the piston and eliminates the possibility of dummy lubrication
- High volume / high pressure option facilitates fast & efficient greasing

GREASING



WORKSHOP SOLUTIONS



**G10030
ALEMLUBE EL SERIES
AIR OPERATED
GREASE GUN**

- Develops grease pressures of up to 6,000psi (414bar)
- 450g cartridge capacity
- Includes 300mm long grease gun flex & four jaw coupler
- Continuous grease flow ensures effortless greasing
- Exclusive air piston design ensures consistent priming
- Three way loading



**G100120
ALEMLUBE
EL SERIES 20KG
GREASE PUMP**

- Maximum fluid pressure of 5,800psi (400bar)
- All types of grease up to NLGI2
- Delivers up to 600g/min
- 4m long hose assembly
- Air consumption of 3.6cfm at 150psi
- Air inlet pressure from 70psi (5bar) to 150psi (10bar)



**G10042
ALEMLUBE
EL SERIES 14.4V NICAD
BATTERY CORDLESS GREASE GUN**

- Heavy duty carry case supplied standard
- Light weight at just 2.1kg
- Battery capacity: 14.4 NiCad battery 1500 mAh
- High pressure delivery: 7500psi (517bar)
- High flow rate of 74cc/min
- 1 x 1 hour quick charger
- 2 x 1500 mAh battery packs



**428262
SAMOA 180KG
GREASE KIT**

- 55:1 ratio grease pump develops up to 7,950psi (548bar)
- Integral filter eliminates the chance of pump tube contamination
- Grease control valve has single shot or continuous flow option
- 180kg drum not included



**425150
SAMOA 55KG
GREASE KIT**

- 55:1 ratio grease pump will generate grease pressures up to 7,950psi (548bar)
- Heavy duty cast alloy air motor cylinder will not wear or distort prematurely
- Integral filter assembly prevents foreign particles entering the pump tube & damaging pump tube components

425170 also available but with trolley



**424170
SAMOA 20KG
GREASE KIT**

- Delivery rates of up to 0.9kg/min
- 55:1 ratio air motor develops grease pressures of up to 7,950psi (548bar)
- Will handle high density, tacky greases up to NLGI2
- Supplied with a 4m long hose assembly & a heavy duty 3 jaw coupler

424150 as above but with trolley



**423021
SAMOA
20KG GREASE KIT**

- 60:1 ratio develops up to 8,700psi (600bar)
- Efficient and quiet operation
- Ideal for use in service vehicles, mining, construction & commercial vehicle workshops
- Handles high density/tacky greases up to NLGI2



**423160
SAMOA
HEAVY DUTY
MOBILE 55KG
GREASE KIT**

- Maximum delivery rate of 2kg/min (greases up to NLGI2)
- Internal muffler facilitates quiet operation of 80dB
- 60:1 ratio develops up to 8,700psi (600bar)
- Low air consumption (450NI/min)
- Drum not included



**426244
SAMOA
HEAVY DUTY
MOBILE 180KG
GREASE KIT**

- 60:1 ratio develops up to 8,700psi (600bar)
- Reduced air consumption
- Robust & durable for extended service life
- Dynamic primer valve enable efficient priming with greases up to NLGI2
- Drum not included



**SG800
ALEMLUBE S SERIES
GREASE HOSE REEL**

- Supplied with 10m x 6mm ID hose & lead in hose
- Working pressure of up to 5,000psi (345bar)
- 1/4" BSP(f) inlet & outlet
- Impact resistant UV stabilised covers for maximum durability
- Detachable steel mounting bracket enables 180° hose reel rotation
- Can be wall, ceiling or floor mounted



**506300
SAMOA
SINGLE PEDESTAL
HOSE REEL**

- Grease hose reel
 - 6.4mm ID x 10m capacity
 - Maximum working pressure 5,000psi (340bar)
 - 0.8m long inlet hose included as standard
 - Lightweight, one-piece moulded composite barrel assembly, will not distort or corrode
 - Pressure cast aluminium arm and base for extra rigidity
- 506321 also available but 15m x 10mm hose



**504350
SAMOA
TWIN PEDESTAL
GREASE HOSE REEL**

- Maximum working pressure of 5,075psi (350bar)
- 1/4" BSP(m) inlet/outlet
- Supplied complete with 15m x 1/4" ID R2 hose & 0.8m inlet hose
- Heavy duty double pedestal construction
- Floor, wall, ceiling or tank mountable

504351 also available but 15m x 10mm hose

MUST HAVES



WORKSHOP SOLUTIONS



**8828N2
ALEMLUBE
20L GEAR OIL
DRUM PUMP**

- Delivers up to 110mL per stroke
 - Ideal pump for the transfer of engine, gear, diff & hydraulic oils
 - Downtube extension & extra Rieke adaptor make the pump suitable for use with a variety of 20L drums
 - Incorporates a filter in the drain back holster to protect against foreign particle contamination
 - UV stabilised long life hose ensures a long service life
- 7710B as above but to suit 10L oil drums



**9978
ALEMLUBE
60L GEAR OIL
DRUM PUMP**

- Ideal for topping up engines, gear boxes, transmissions & differentials
- Semi automatic operation delivers 500mL per stroke
- Spring operated



**304600
ALEMLUBE
OIL TRANSFER DRUM PUMP**

- Delivers approximately 0.45L per stroke
- Suitable for the transfer of light to medium viscosity lubricants
- Telescopic down tube makes the pump suitable for 60L & 205L drums
- Includes a delivery hose & outlet spout
- Steel body & brass segmented piston makes the pump also suitable for the transfer of kerosene, coolant & transmission fluids



**5000MFN / 2000MFN / 1000MFN
ALEMLUBE
MULTI PURPOSE OIL MEASURES**

- Polyethylene oil measure will not dent, scratch or corrode
- Flexible delivery spout makes the topping up of engines, gear boxes, diffs, transmissions & crank cases a quick and easy proposition
- Screw on lid helps to prevent contaminants from entering the oil measure & ultimately vehicle engines

5000MFN 5L oil measure with flexible spout
2000MFN 2L oil measure with flexible spout



**10430CF / 10350CF /
10270CF / 10220CF
ALEMLUBE
CLEAN FUNNELS**

- Available in a range of sizes to cater for differing flow requirements
- Screw down caps at both ends of the funnels ensure that they are contaminant free for the next time you need to use them

10430CF – 1,420mL capacity - slim line delivery port
10350CF – 1,420mL capacity - high flow delivery port
10270CF – 1,180mL capacity



**7705B
ALEMLUBE
5L CONTAINER
OIL PUMP**

- Delivers up to 6mL on the downstroke
- Ideal for topping up difficult to access oil filling points
- Suitable for use with hydraulic oil, engine oil, gear oil and transmission fluids

7701B suits 1L containers
7702B suits 2L containers
7704C with adaptor suits 4L containers
7705C with adaptor suits 5L containers



**10070
ALEMLUBE MOBILE
WASTE OIL
DRAINER / EXTRACTOR**

- Collects waste oil from vehicle gear box or engine
- Tank Capacity: 70L
- Collect tray capacity: 16L
- Air Consumption: 200L/min
- Working Temperature: 40~60°C (for engine oil)
- Height: 1,100mm~1,680mm



**30080
ALEMLUBE WASTE
OIL DRAINER**

- Transfers & captures waste oil from crankcases, transmissions & differentials
- Catchment bowl capacity of 20L
- Holding tank capacity of 80L
- Height adjustable waste oil reservoir
- Equipped with a pneumatic safety relief valve calibrated at 14psi (1bar)



**372400
SAMOA
WASTE OIL
DRAINER / EXTRACTOR**

- Drain bowl capacity of 20L
- Holding tank capacity of 100L
- Maximum working height of 2,000mm & minimum working height of 1,400mm
- Waste fluids can be pressurised or pumped out of the 100L capacity holding tank



**ALE-20BAH
ALEMLUBE 3/4"
ALUMINIUM DIAPHRAGM PUMP**

- Maximum flow rates of 100L/min
- 3/4" BSP(f) inlet/outlet
- Aluminium body and hytrel diaphragms
- Suitable for the transfer of diesel fuel, gear oil, engine oil, antifreeze & waste water
- Maximum delivery per cycle of 350mL
- Mounting hole layout of 140mm x 195mm
- Dimensions of 249mm (W) x 319mm (H) x 180mm (D)



**551010
SAMOA 2"
DIRECTFLO® DIAPHRAGM PUMP**

- Maximum free delivery of 100L/min
- Delivery per stroke of 0.35L
- Air pressure operating range of 45psi to 100psi (3bar to 7bar)
- 3/8" NPSM(f) air inlet
- 1" NPSM & flange fluid inlet/outlet
- Solids in suspension maximum size of 4mm
- Transfers oil, waste oil, antifreeze, ATF & water



**DP70020
ALEMLUBE EL SERIES 3/4"
DIAPHRAGM PUMP**

- Flow rates of up to 90L/min
- Maximum working pressure of 120psi (8bar)
- Maximum delivery per cycle of 225mL
- Maximum air consumption of 540L/min
- Maximum solid diameter of 2.4mm
- 3/4" BSP(f) fluid inlet/outlet & 1/4" BSP(f) air inlet
- Dimensions of 228mm (W) x 202mm (D) x 306mm (H)



WASTE OIL & ADBLUE®

WORKSHOP SOLUTIONS

**75460-WO
ALEMLUBE
400L TWIN SKINNED
WASTE OIL TANK
WITH DRAINING FUNNEL**

- Complete with 400 litre twin skinned tank with waste oil funnel



**42100
ALEMLUBE
COMMERCIAL VEHICLE
MOBILE WASTE OIL DRAINER**

- Holding tank capacity of 100L
- 860mm handle length
- 145mm high swiveling front rubber wheels facilitate accurate mobility
- Internal baffles reduce the possibility of waste oil spillage
- Sturdy & durable construction
- Dimensions: 1,200mm (L) x 645mm (W) x 200mm (D)



**SC60010N
ALEMLUBE
2 DRUM SPILL CONTAINER**

- 400L capacity
- Designed for static spill containment for up to 2 x 205L drums
- Manufactured from high strength polyethylene that will not rust or corrode
- Compatible with most forklifts and pallet trucks
- Removable platform for ease of cleaning
- Dimensions of 1,320mm (L) x 670mm (W) x 450mm (H)



**AB80055
ALEMLUBE EL SERIES
ADBLUE® ROTARY
HAND OPERATED DRUM PUMP**

- Rotary action drum pump
- Flow rates of up to 18L/min
- Delivery of 0.3L per rotation
- Suits 60L & 205L drums
- Supplied complete with 3 metre delivery hose, stainless steel spout, 2" BSP & Trisure drum bung adaptors
- Also suitable for pumping water



**AB80050N
ALEMLUBE EL SERIES
ADBLUE® ELECTRONIC METER**

- Flow rates of up to 100L/min
- Operating pressures of up to 290psi (20bar)
- 1" BSP(m) inlet/outlet connections
- Accurate to ±1.0%
- Capable of calibration
- Electronic card with LCD display
- Display can be rotated to 4 different positions



**206723
PIUSI 240V ADBLUE®
SUBMERSIBLE TRANSFER PUMP**

- Flow rate of 35L/min
- Centrifugal pump fitted with a turbine regenerator
- Non-return valve and built-in innovative pressure regulation system
- Consistent flow rate and accuracy during delivery reduces energy consumption levels
- Body is stainless steel & technopolymer
- Compact size & heavy duty





Following extensive consultation with you, the Alemlube Automotive team will design your new workshop maximising the available space, resulting in a practical, functional and efficient solution..

Accessing an extensive range of automotive workshop equipment from the world's foremost manufacturers, Alemlube can supply, install and maintain all necessary equipment and components and customised manufacturing.

All air, oil, waste oil and water supply lines & a quality range of fluid handling equipment including:

2 post and 4 post vehicle hoists and scissor lifts

An impressive range of wheel service equipment

Exhaust extraction equipment

Bulk waste oil and new oil off the shelf and custom built tanks

Workshop benches and storage solutions



ALEMLUBE WORKSHOP DESIGN & FITOUT DIVISION



The complete workshop is what we do best.

You can trust the design, supply of equipment, installation, commissioning and servicing of your workshop equipment to the dedicated team of Alemlube professionals.

